



AC-225P/156-60S
 AC-230P/156-60S
 AC-235P/156-60S

www.axitecsolar.com

AXITEC
 high quality german solar company

AXIpower

60 cell / polycrystalline photovoltaic modules

High performance photovoltaic modules

 German engineered, assembled in Asia

The advantages:

10
Years

10 years manufacturer guarantee

+
Wp

Guaranteed positive power tolerance from 0-5 Wp by individual measurement

↓
5.400Pa

Maximum 5400 Pa snow load

100%

100% electroluminescence inspection

Soft Grip

High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction

IP67

High quality junction box (30 A) and connector systems

↔
Impp


Sorting by Impp



Fig. similar 60P156USA110926G

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

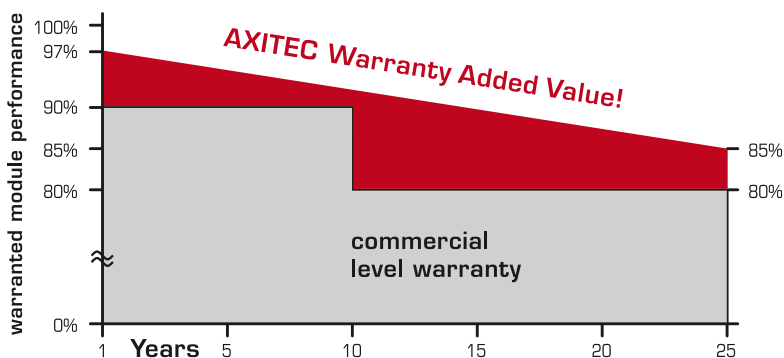

Listed: QIGU. E347378



Management system TÜV-certified
 DIN ISO 9001:2008, Reg.-No. 12 100 34403



Full Member of PV CYCLE

Distributed by:



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25° C)

Type	Nominal output Pmpp	Nominal voltage Vmpp	Nominal current Impp	Short circuit current Isc	Open circuit voltage Voc	Module conversion efficiency
AC-225P/156-60S	225 Wp	29.90 V	7.53 A	8.18 A	36.70 V	13.83 %
AC-230P/156-60S	230 Wp	30.00 V	7.67 A	8.34 A	36.80 V	14.14 %
AC-235P/156-60S	235 Wp	30.10 V	7.81 A	8.44 A	36.80 V	14.45 %

Design

Frontside	0.13 inches (3,2 mm) hardened, low-reflection white glass
Cells	60 polycrystalline high efficiency cells 6 inches (156 x 156 mm)
Backside	Composite film
Frame	1.57 inches (40 mm) silver anodized aluminium frame

Mechanical data

L x W x H	64.57 x 39.06 x 1.57 inches (1640 x 992 x 40 mm)
Weight	44.01 lbs (20,0 kg) with frame

Power connection

Socket	Protection Class IP65 (3 bypass diodes)
Wire	approx. 43.3 inches, AWG 11 (1.1 m, 4 mm ²)
Plug-in system	Plug/socket IP67, MC4 mateable

Limit values


System voltage	600 VDC (UL) 1000 VDC (IEC)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m ²
Reverse current feed IR	30.0 A

(No external voltages greater than Vo may be applied to the module)

* NOCT, irradiance 800W/m²; AM 1.5; wind speed 1m/s; Temperature 20°C


Temperature coefficients

Voltage Voc	-0.33 %/K
Current Isc	0.06 %/K
Output Pmpp	-0.46 %/K

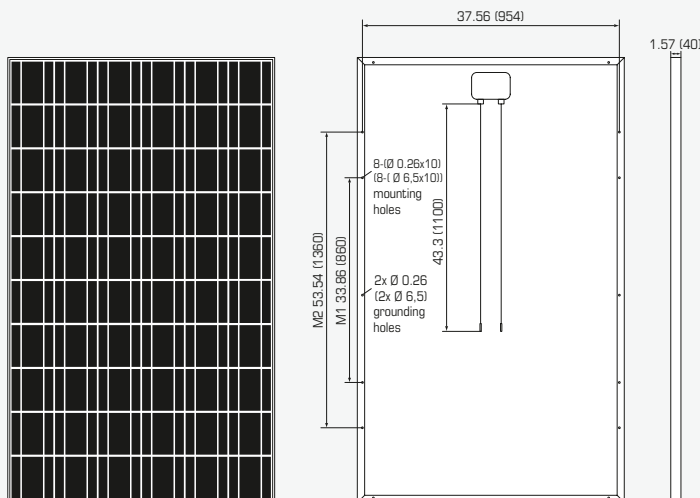

All dimensions in inch (mm)

I-U characteristic curve at 1000-800-500-250 W/m²

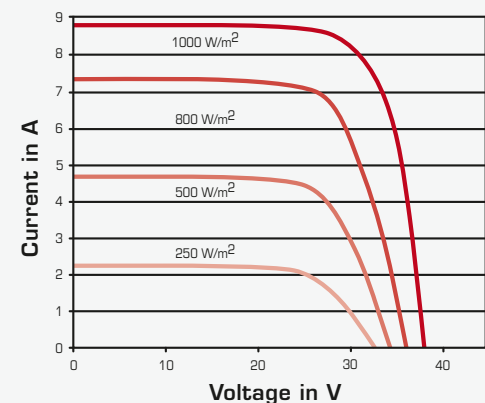

Example for AC-230P/156-60S